




OWNER INSPECTIONS

1300 471 805

booking@ownerinspections.com.au

<https://www.ownerinspections.com.au/>

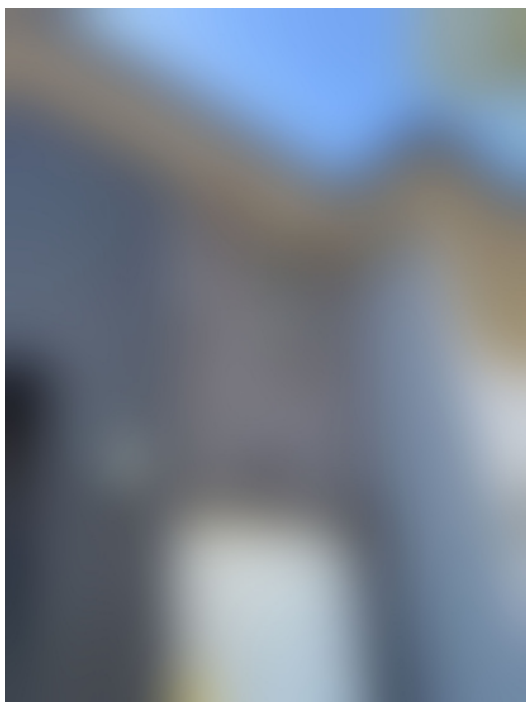

ROOF ONLY INSPECTION REPORT

Sample Property

Sample
Property

Name withheld

13/04/2026



Inspector

Ibrahim Durdu

Registered Building Practitioner

1300 471 805

booking@ownerinspections.com.au

TABLE OF CONTENTS

1: Inspection Details	11
2: Inspectors Comment	12
3: Roof leak investigation	13

Inspection Agreement

1. This is an Agreement between you, the undersigned Client, and us, Owner Inspections.
2. If there is more than one Client, you are signing on behalf of all of you, and you represent that you are authorised to do so.
3. 'Owner Inspections' Report carries out in accordance with the guidelines of Australian Standard 4349.1 2007 (Standard) which covers the minimum requirements for the Visual Inspection of residential buildings. The purpose of the Inspection is to provide a visual inspection and provide in-writing advice only to the prospective purchaser/owner regarding the condition of the property at the date and time of Inspection.
4. The Report is NOT a certificate of compliance that the property complies with the requirements of any Act, regulation, ordinance, local law or by-law, local council or other authorities, or as a warranty or an insurance policy against problems developing with the building in the future.
5. The Report is based on the condition of the inspected property at the date and time of Inspection. While the Inspection and Report conducted and prepared with the possible care, still some access limitation and safety hazards can limit the Inspector's ability to detect all defects. These limits and safety items are defined in the standards.
6. The Report assumes that the existing use of the building will continue. If the vendor/owner wishes to change the use of the property, a permit to be acquired from the local authorities.
7. This Report does not include the identification of unauthorised building work or work not compliant with building/council regulations. The Report does not include identification of the municipality regulations and requirements as well as identification of design defects for the construction. According to the Standards, the estimate of the costs of the rectifications is not required in this Report.
8. The construction stage Inspection Report is prepared based on the opinion and assessment of the Inspector at the date and time of the Inspection on the general condition of the inspected property. The Report will not guarantee to include all defects. The Report reflects the quality of workmanship only and will not diminish the responsibility of the builder. The building company has and will have the full responsibility of the build as specified in the law and regulations. This Inspection Report is to Client as a piece of advice and is not a mandatory stage Inspection specified in the Acts and Regulations and building permit.
9. We do not perform engineering, architectural, plumbing, or any other job function requiring an occupational license in the jurisdiction where the property located. If we hold a valid occupational license, we may inform you of this, and you may hire us to perform additional functions. Any agreement for such additional services shall be in a separate writing.
10. Checking Legal matters, building contract, design, easements, local council restrictions and requirements, crossovers, title, boundaries, connections, building

envelope, planning and building permits, setbacks and zonings are out of this Inspection and Report scope of work.

11. The Report will not include defects that may only be apparent in certain weather conditions or defects that have not yet appeared due to prolonged periods of wet or dry weather or other reasons.

12. An inspector shall only inspect areas where safe and unobstructed access provided. Reasonable access is defined in AS4349.1-2007 and this Agreement. Reasonable access does not include removing stored material/goods, nails, screws, cutting or making access hole, and moving furniture.

13. We will not test for the presence of radon, a harmful gas, mould, presence of asbestos, soil contamination, or other environmental hazards or violations.

14. The Report does not identify the presence of pests, or any damage caused by pests (e.g. termites, borers, etc.) unless the Client added to the requested service.

15. The Inspection is not intended to include rigorous assessment of all building elements in a property. Any maintenance and general advice items are a helpful guide only. The Report does not necessarily include all maintenance items.

16. If you request a re-Inspection, the re-Inspection is subject to the terms of this Agreement and re-Inspection fee.

17. The Report will be based on the Inspector's assessment on major defects and safety hazards evident and visually visible on the date and time of the Inspection. The Report will also provide a general assessment of the property and collectively comment on minor defects which would form a regular part of property maintenance.

18. Limitation on Liability and Damages: We are not liable for any cost of repair or replacement of unreported defects, either current or arising in the future. In all cases, our liability is limited to liquidated damages in an amount not greater than 1.5 times the fee you paid us. You waive any claim for consequential, exemplary, special or incidental damages or for the loss of the use of the home/building. You acknowledge that these liquidated damages are not a penalty, but that we intend it to: (i) reflect the fact that actual damages may be difficult or impractical to ascertain; (ii) allocate risk between us; and (iii) enable us to perform the Inspection for the agreed-upon fee. If you wish to eliminate this liquidated damage provision, we are willing to perform the Inspection for an additional fee of \$2,000 payable in advance upon your request.

19. Our Inspection and Report are for your use only. You give us permission to discuss our observations with real estate agents, owners, builders, or other interested parties. You will be the sole owner of the Report and all rights to it. We are not responsible for the use or misinterpretation by third parties, and third parties who rely on it in any way do so at their own risk and release us (including employees and business entities) from any liability whatsoever. You are not allowed to send/show our Report and/or a quotation to our market competitors. If Owner Inspections realise that our competitor has/saw our Report belonging to you and your property, we have the right to take legal action to retrieve damages. If you or any person acting on your behalf provide the Report to a third party who then sues you and/or us, you release us from any liability and agree to pay our costs and legal fees in defending any action naming us. Our Inspection and Report are in no way a guarantee or warranty, express or implied, regarding the future

use, operability, habitability or suitability of the home/building or its components. We disclaim all warranties, express or implied, to the fullest extent allowed by law.

20. You agree that the exclusive venue for any litigation arising out of this Agreement shall be in Australia, where we have our principal place of business. If you fail to prove any claim against us, you agree to pay all our legal costs, expenses and attorneys' fees incurred in defending that claim.

21. If a court declares any provision of this Agreement invalid, the remaining provisions remain in effect. This Agreement represents our entire Agreement; there are no terms other than those set forth herein. All prior discussions are merged into this Agreement. No statement or promise by us shall be binding unless reduced to writing and signed by one of our authorised officers. Any modification of this Agreement must be in writing and signed by you and by one of our authorised officers. This Agreement shall be binding upon and enforceable by the parties and their heirs, executors, administrators, successors and assignees. You will have no cause of action against us after one year from the date of the Inspection.

22. If a court finds any term of this Agreement ambiguous or requiring judicial interpretation, the court shall not construe that term against us because of the rule that any ambiguity in a document is construed against the party drafting it. You had the opportunity to consult qualified legal advice before accepting this Agreement.

23. You may not assign this Agreement.

24. BY BOOKING THE INSPECTIONS, YOU CONFIRM THAT YOU HAVE CAREFULLY READ THIS AGREEMENT. YOU AGREE TO IT AND ACKNOWLEDGE RECEIVING A COPY OF IT.

Purpose of Inspection

The purpose of the Inspection is to provide advice to a prospective purchaser or other interested parties regarding the condition of the property at the time of Inspection.

Conditions of Inspection

An Inspection Report may be conditional on Prevailing weather conditions or recent occupancy and use of services that might affect observations; Information provided by the Client or the agents of the Client; Deliberate concealment of defects; Any other relevant factor limiting the Inspection.

Scope of Inspection

The Inspection shall comprise visual assessment of the property to identify major defects and to form an opinion regarding the general condition of the property at the time of Inspection. Where the Client or other interested party requires only assessment of the structure of the property, the scope of the Inspection shall be limited to that described in Appendix A. An estimate of the cost of rectification of defects is not required in an Inspection report in accordance with this Standard.

Inspection Records

The Inspector shall record the following information prior to, or during the course of, the Inspection: Identity of the Inspector undertaking the Inspection; Identity of the Client; The address of the property inspected; Date of Inspection; Weather conditions at the

time of the Inspection; Limitations of Inspection with respect to the accessible area; Observation of defects.

Areas for Inspection

The Client shall arrange right of entry, facilitate physical access to the property and supply necessary information to enable the Inspector to undertake the Inspection and prepare a report. The Inspector is not responsible for arranging access to property or parts of the property. Areas where reasonable entry is denied to the Inspector, or where reasonable access is not available, are excluded and do not form part of, the Inspection.

The Inspector shall inspect accessible parts of the building and appurtenances, together with the relevant feature of the property within 30 m of the building and within the boundaries of the site, or as otherwise agreed in the Inspection Agreement. In this context, relevant features include car accommodation, detached laundry, ablution facilities and garden sheds, retaining walls more than 700 mm high, paths and driveways, steps, fencing, earth embankments, surface water drainage and stormwater run-off.

The following areas shall be inspected where applicable: The interior of the building; The roof space; The exterior of the building; The sub-floor space; The roof exterior; The property within 30 m of the building subject to Inspection.

Significant items to be reported are as follows:

- (a) Major defects.
- (b) A general impression regarding the extent of minor defects, for example, significantly deteriorating exterior paint.
- (c) Any major defect that is an urgent and serious safety hazard, for example, unsafe balustrades or imminent collapse of a structural member.

Items to be inspected where applicable:

Interior: Ceilings, Walls, Timber floors, Concrete floors, Timber or steel frames and structure, Timber windows, Metal/Aluminium framed windows, Doors and Frames, Kitchen: Benchtop, Cupboards, Sink/Taps, Tiles, Bathroom/WC/Ensuite: Cistern and pan, Bidet, Taps, Tiles, Bath, Shower, Vanity, Basins, Ventilation, Mirror; Laundry: Taps, Tubs/Cabinet, Tiles, Ventilation; stairs: Stringer, Handrail/Balusters, Treads and risers.

Exterior: Walls, Timber or steel frames and structure, Stairs, Balconies, Verandas, patios, decks, suspended concrete floors, balustrades, Roof, Skylight, Valleys, Guttering, Downpipes, Eaves, Fascia and barges.

Roof Space: Roof covering, Roof framing, Sarking, Party walls, Insulation.

Subfloor Space: Timber Floor, Suspended concrete floors.

The site: Car accommodation, detached laundry, ablution facilities and garden sheds, Retaining walls, Paths and driveways, Steps, Fencing, Surface-water.

Exclusion of items from Inspection:

Footings below ground.

The operation of fireplaces, solid fuel heaters, chimneys and flues.

Electrical appliances including dishwashers, incinerators, ovens, ducted vacuum Systems, Alarm and Intercom systems, air-conditioning.

Swimming pools and associated filtration and similar equipment.

Concealed damp-proof course, plumbing, gas fitting and fixtures.

Concealed tie-downs and bracing, framing-timbers or any areas concealed by wall linings/sidings.

Health hazards (e.g., allergies, soil toxicity, lead content, radon, presence of asbestos or urea-formaldehyde).

Soil conditions, control joints.

Sustainable development provisions, Environmental matters (e.g., BASIX, water tanks, NCC Environmental Provisions), Energy and lighting efficiency, Landscaping.

Rubbish, Stored items, furniture and accessories.

Safe and reasonable access

The extent of accessible areas shall be determined by the Inspector at the time of Inspection,

based on the conditions encountered at the time of Inspection. The Inspector shall also determine whether sufficient space is available to allow safe access. The Inspection shall include only accessible areas and areas that are within the Inspector's line of sight and close enough to enable reasonable appraisal. Reasonable access shall be determined as below:

Roof interior: minimum 400mm x 500mm access hole, 600mm x 600mm crawl space, accessible from a 3.6m ladder.

Roof exterior: Accessible from a 3.6m ladder placed on the ground.

Sub Floor Area: 400mm x 500mm access hole; 400mm x 500mm crawl space.

Reasonable access does not include the cutting of access holes or the removal of screws and bolts or any other fastenings or sealants to access covers.

Subfloor areas sprayed with chemicals are not to be inspected unless it is safe to do so. Areas, where reasonable entry is denied to the Inspector or where reasonable access is not available, are excluded from and do not form part of the Inspection.

Access Limitation:

The Inspector will conduct a non-invasive visual Inspection which will be limited to those accessible areas and sections of the property to which Safe and Reasonable Access is both available and permitted on the date and time of the Inspection. Areas where reasonable entry is denied to the Inspector, or where safe and reasonable access is not available, are excluded from and do not form part of, the Inspection. Those areas may be the subject of an additional Inspection upon request following the provision or reasonable entry and access.

The Inspection excludes the inside of walls, between floors, inside skillion roofing, inside the eaves, behind stored goods in cupboards, and other areas that are concealed or

obstructed. The Inspector will not dig, gouge, force or perform any other invasive procedures.

Examples of access limitations:

Legal right of entry, locked doors/windows, security systems, pets, furniture or other Obstructions, Height, narrow boundary clearances, thick vegetation, small roof or crawl space, adverse weather conditions.

The Report shall identify any area or item within the scope of the Inspection that was not inspected and the factor that prevented Inspection.

Acceptance criteria:

The building shall be compared with a building that was constructed in accordance with the generally accepted practice at the time of construction and which has been maintained such that there has been no significant loss of strength and serviceability.

Definitions

Access hole (cover): An opening in flooring or ceiling or other parts of a structure (such as service hatch, removable panel) to allow for entry to carry out an Inspection, maintenance or repair.

Accessible area: An area of the site where sufficient, safe and reasonable access is available to allow Inspection within the scope of the Inspection.

Building element: Portion of a building that, by itself or in combination with other such parts, fulfils a characteristic function.

Client: The person or other entity for whom the Inspection is being carried out.

Defect: Fault or deviation from the intended condition of a material, assembly, or component.

Inspection: Close and careful scrutiny of a building carried out without dismantling, in order to arrive at a reliable conclusion as to the condition of the building.

Inspector: Person who is responsible for carrying out the Inspection.

Limitation: Any factor that prevents full or proper Inspection of the building.

Structural defect: Fault or deviation from the intended structural performance of a building element.

Structural element: Physically distinguishable part of a structure; for example, wall, columns, beam, connection.

Subfloor space: Space between the underside of a suspended floor and the ground.

Roof space: Space between the roof covering and the ceiling immediately below the roof covering.

Site: Allotment of land on which a building stands or is to be erected.

Defect Categories:

Visually Fine (F): Item inspected and is visually fine.

General Advice (G): A general advice item is neither defect nor fine. It is only a recommendation/advice/description by Inspector.

Defect (D): Fault or deviation from the intended condition of a material, assembly, or component. Repair is recommended on Defect items.

Major Defect (M): A defect which can cause further severe damage (structural or non-structural) to the property or make it unsafe. The rectification must carry out ASAP to avoid damages/injuries.

Unable to Inspect (U): An area where the Inspector could not inspect at the time of Inspection due to one or more safe/reasonable access limitations.

Not Applicable (N): An item which is not applicable to the area of the Inspection.



GENERAL
ADVICE/MAINTENANCE
ITEMS



MAJOR DEFECT/SAFETY
HAZARD

-  2.1.1 Inspectors Comment - Inspectors Summary: Inspectors comment
-  3.1.1 Roof leak investigation - Views: View
-  3.1.2 Roof leak investigation - Views: Valley discharge
-  3.1.3 Roof leak investigation - Views: Gutter discharge
-  3.1.4 Roof leak investigation - Views: Flashing
-  3.1.5 Roof leak investigation - Views: Sarking roof space
-  3.1.6 Roof leak investigation - Views: Hole under valley
-  3.1.7 Roof leak investigation - Views: Spreader discharge
-  3.1.8 Roof leak investigation - Views: Pressure flashing

1: INSPECTION DETAILS

		F	G	D	M	U	N
1.1	General						

F = Visually Fine G = General Advice D = Defect M = Major Defect U = Unable to Inspect N = Not Applicable

Information

General: In Attendance Client	General: Weather Conditions Clear	General: Type Of Building Duplex
General: How Many Levels? Double Storey	General: External Building Material Brick Veneer	General: Windows Aluminium
General: Flooring Slab, Timber	General: Piers Not Applicable	General: Building Age Na
General: Roof Tiled		

Limitations

General

REASONABLE ACCESS TO THE PROPERTY WAS RESTRICTED BY:

Roof Space Due To Limited Crawl Space

2: INSPECTORS COMMENT

		F	G	D	M	U	N
2.1	Inspectors Summary				X		

F = Visually Fine G = General Advice D = Defect M = Major Defect U = Unable to Inspect N = Not Applicable

Observations

2.1.1 Inspectors Summary

INSPECTORS COMMENT

 Major Defect/Safety Hazard

The roof to both dwellings exhibits multiple defects to the roof drainage, flashing, and weatherproofing details as identified above, including non-compliant valley terminations, inadequate redirection of roof water, inappropriate spreader discharge, sagging sarking, and missing or deficient pressure flashings. These issues collectively increase the risk of roof leaks, water ingress to the building fabric, and premature deterioration of roofing and wall elements.

It is recommended that both sides of the roof be fully rectified by a suitably qualified roofing plumber, with all roof drainage components, flashings, spreaders, valleys, and sarking brought into compliance with the requirements and performance intent of the NCC for roof drainage and weatherproofing, and the applicable Australian Standards for roofing, cladding, and stormwater systems. All remedial works should follow relevant manufacturer installation instructions as well as Australian Standards to ensure a durable and compliant outcome.

3: ROOF LEAK INVESTIGATION


		F	G	D	M	U	N
3.1	Views			X	X		


F = Visually Fine G = General Advice D = Defect M = Major Defect U = Unable to Inspect N = Not Applicable


Observations

3.1.1 Views
VIEW


 General Advice/Maintenance Items

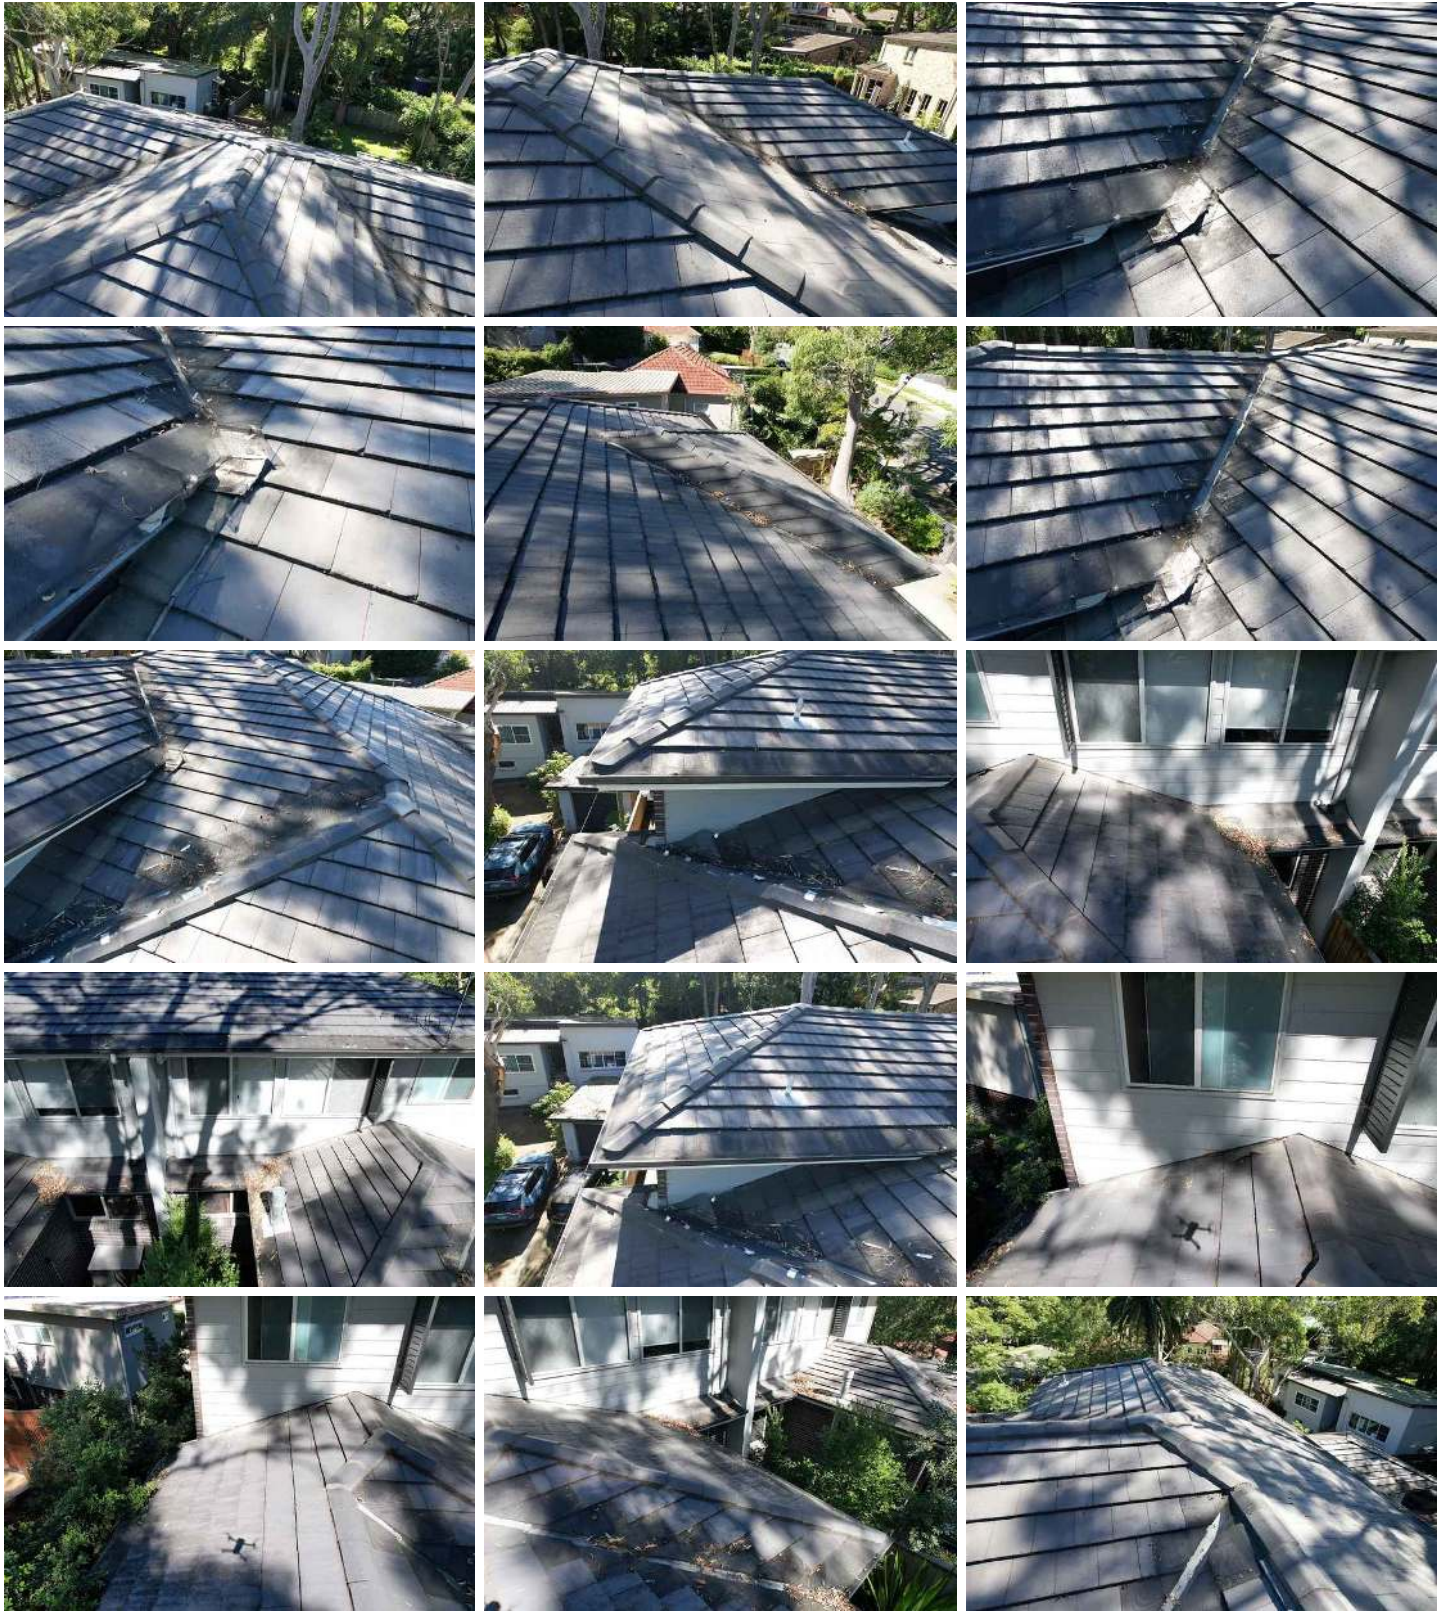

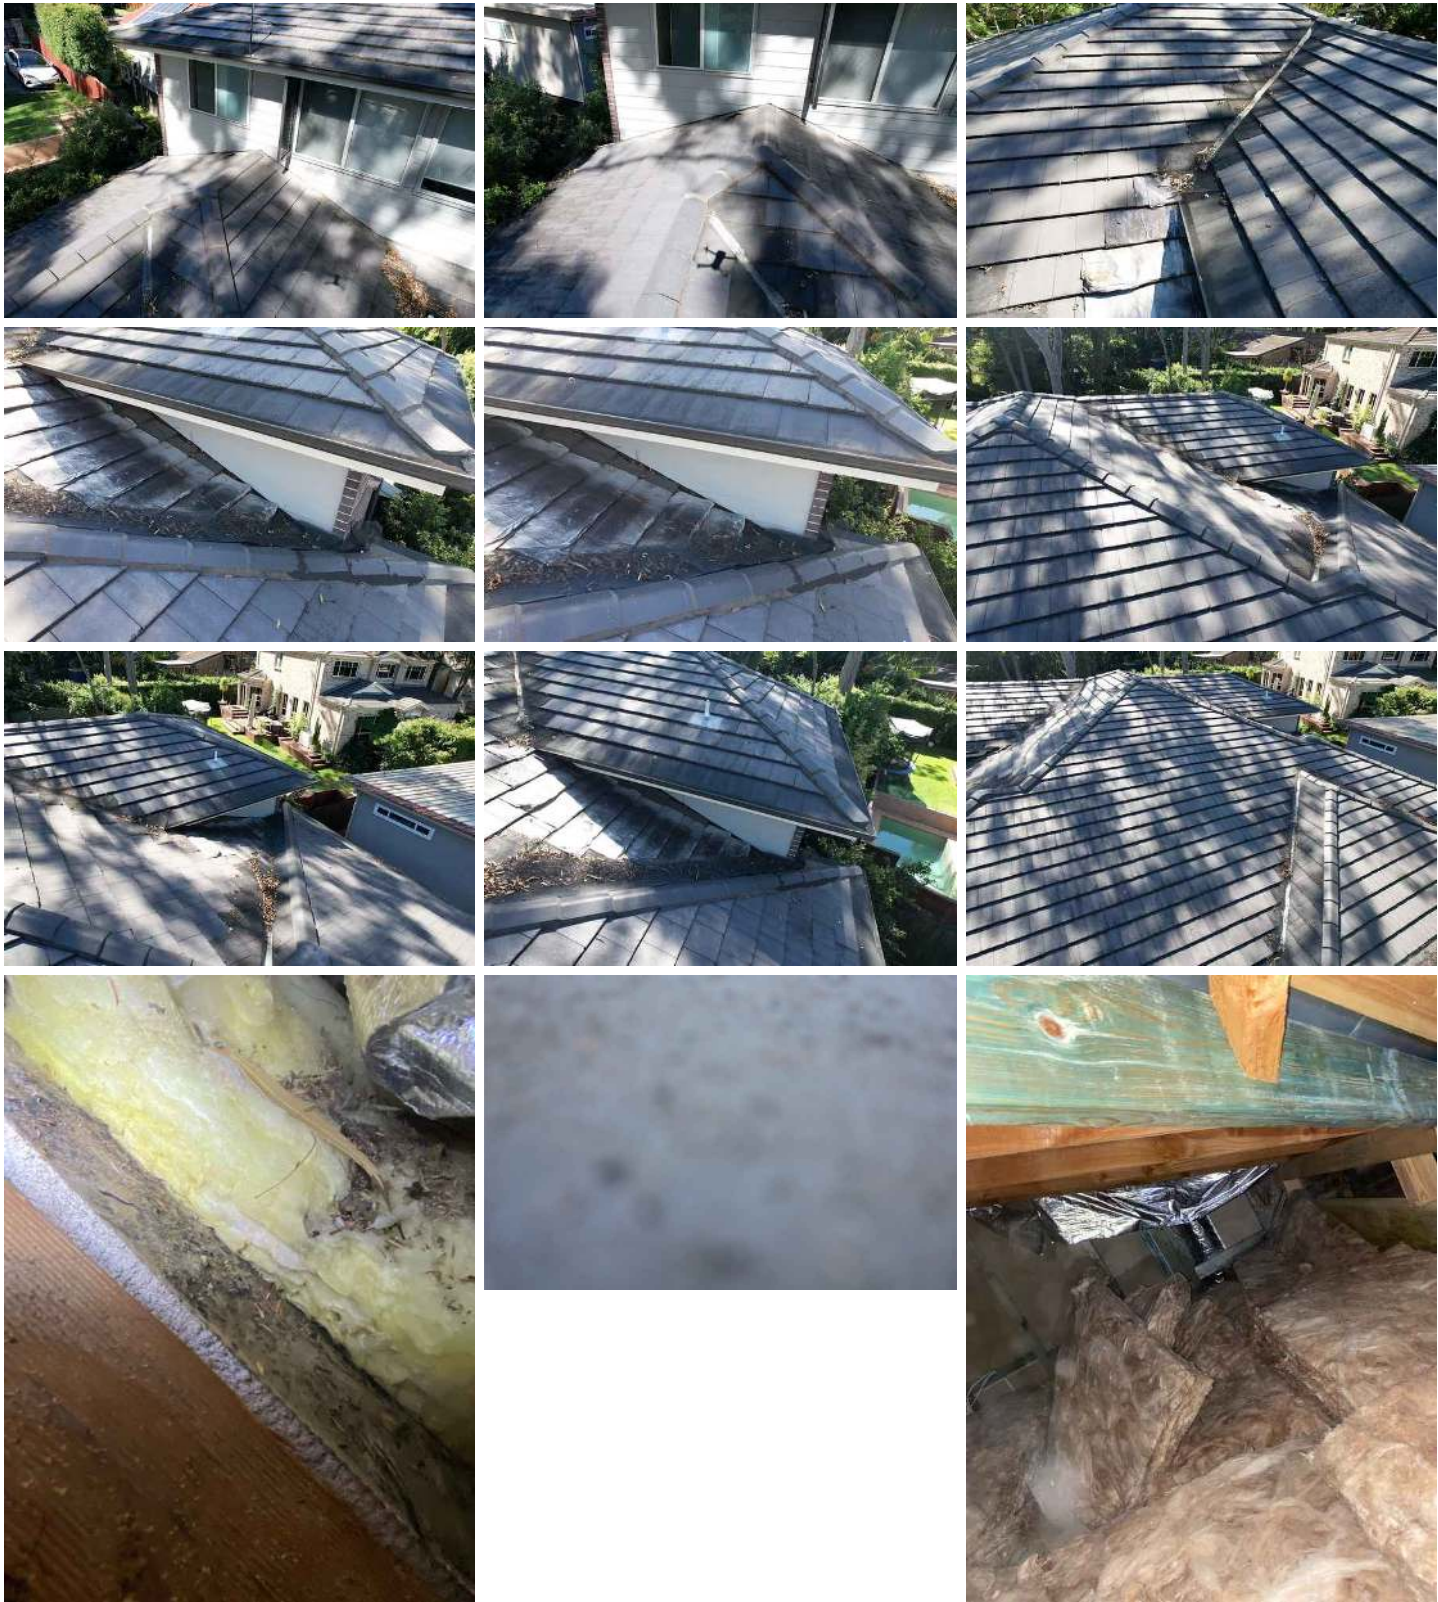

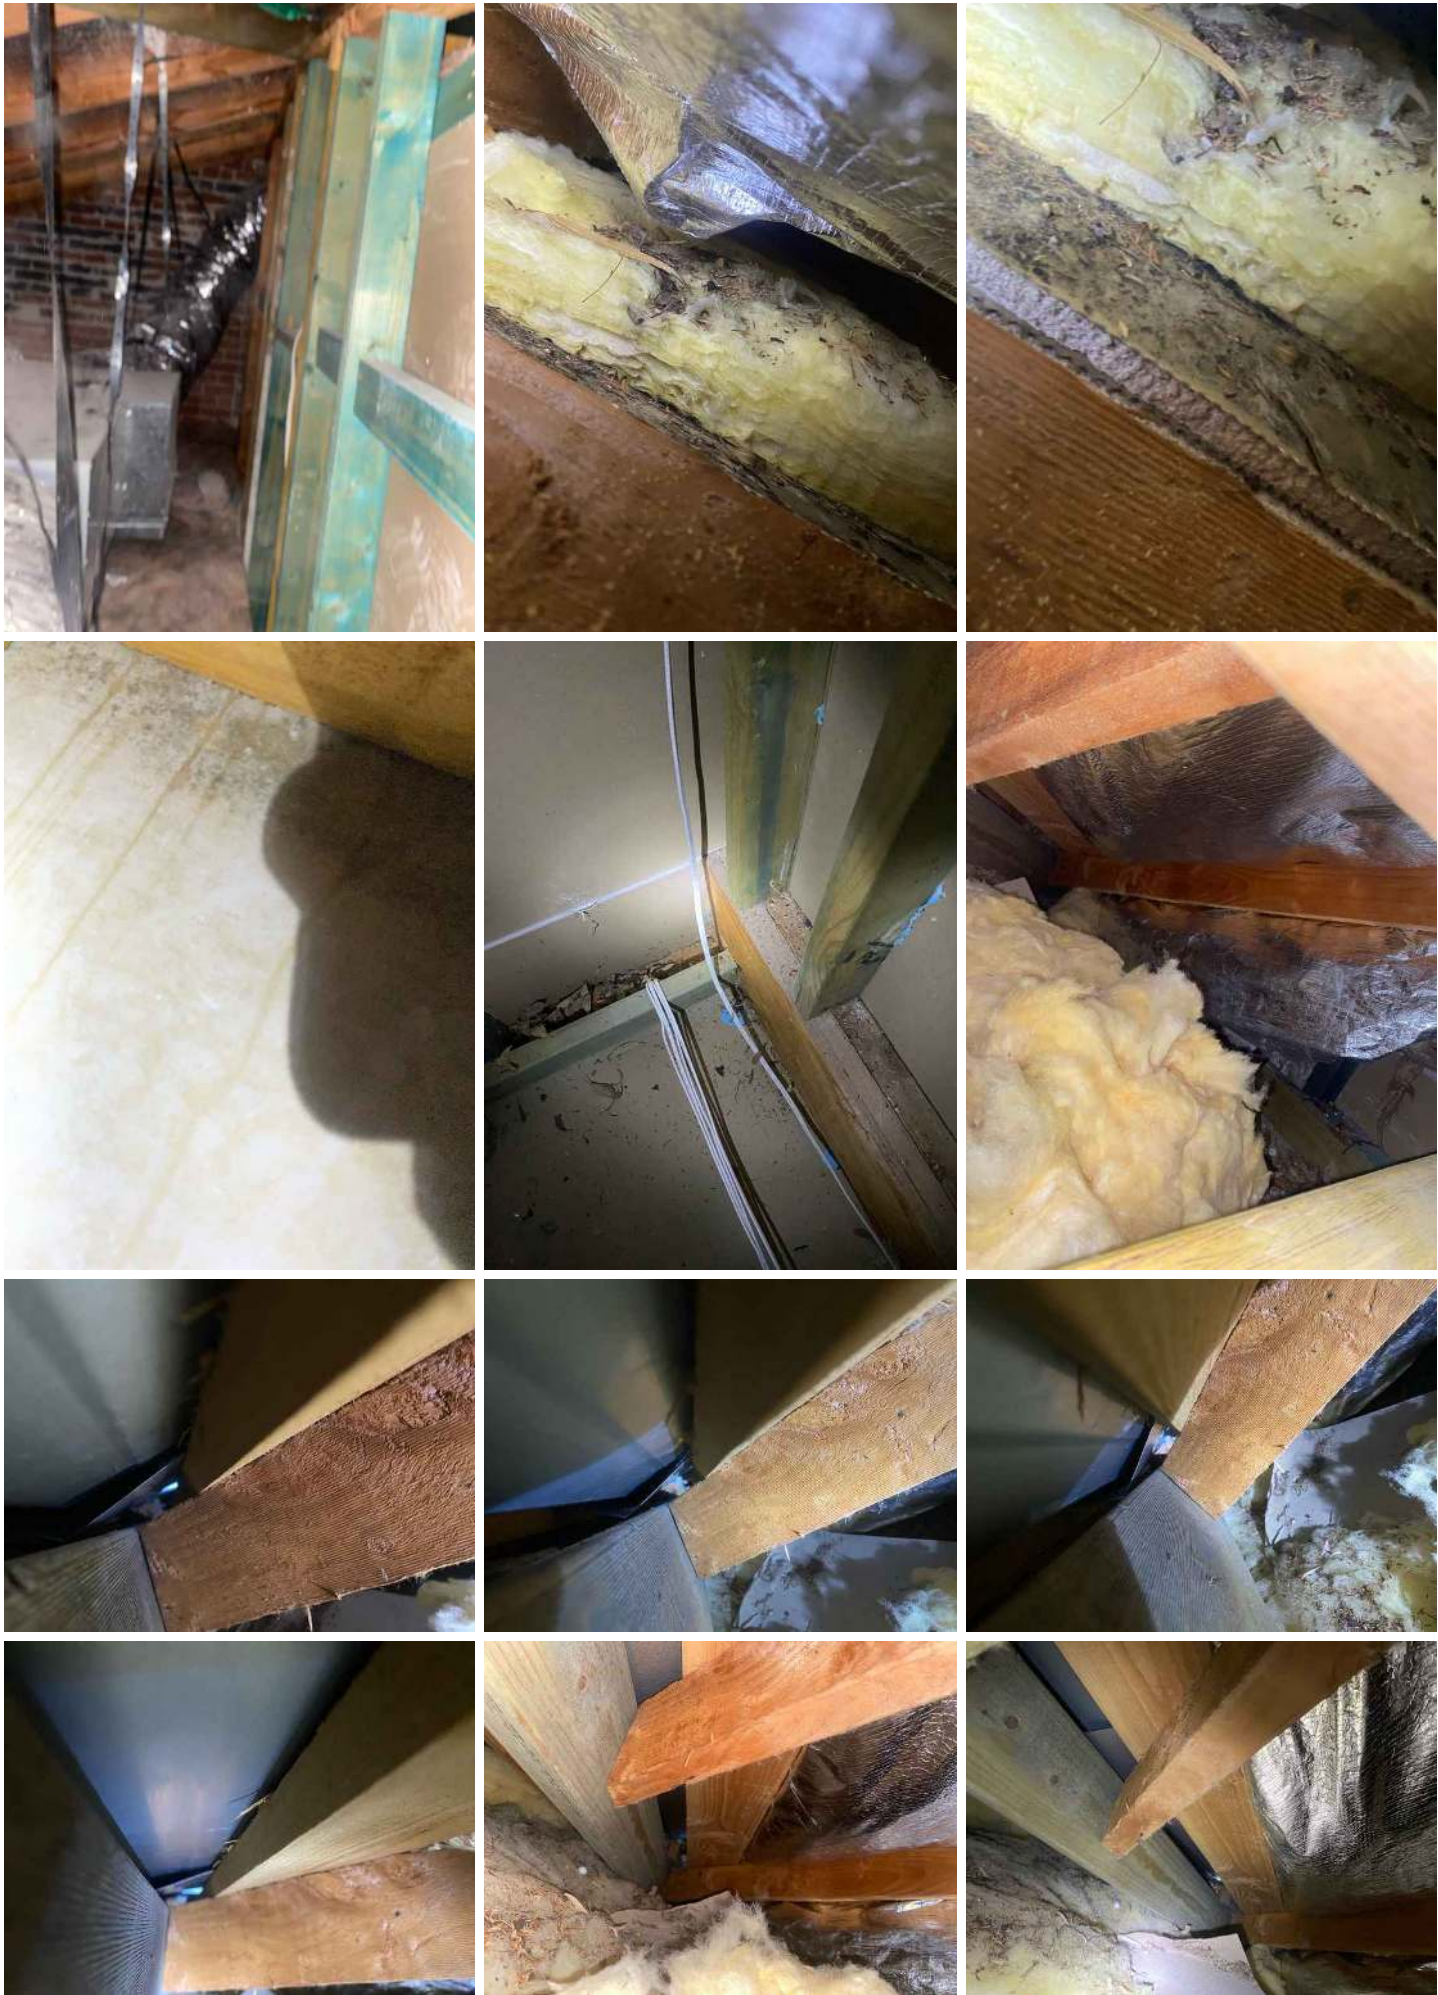



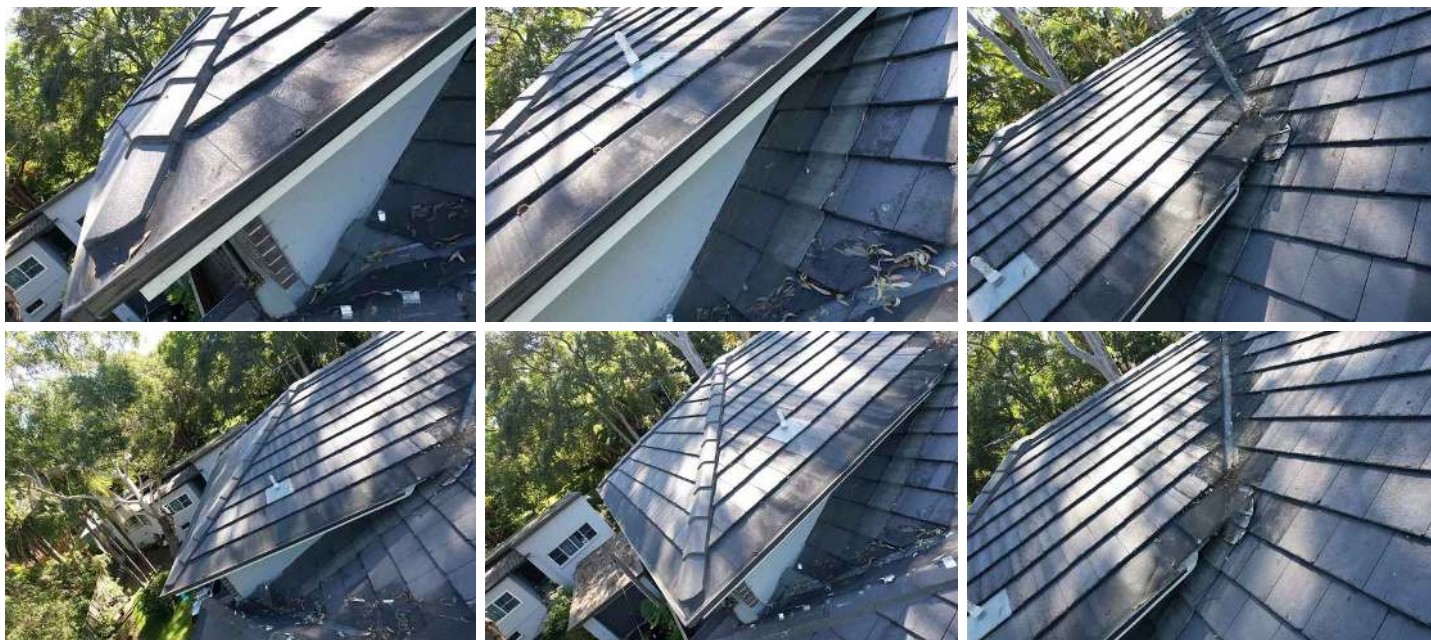

3.1.2 Views

VALLEY DISCHARGE



Major Defect/Safety Hazard

The valley gutter installation, as observed, is discharging directly towards the wall cladding with no flashing installed beneath the cladding or on the adjoining roof surfaces. This arrangement is non-compliant, as it does not provide an adequate waterproofing detail at the roof-wall junction and does not satisfy the NCC performance requirements for weatherproofing of roofs and external walls, nor the intent of relevant roof drainage and cladding standards (such as AS/NZS 3500 for roof drainage and AS 1562 for roofing and wall cladding interfaces).

The NCC requires that roofs and external walls be constructed to prevent the entry of water that could cause unhealthy or damaging conditions, including at valley terminations and roof-wall junctions. Allowing a valley gutter to discharge towards or near the wall cladding without appropriate flashings or a compliant termination detail presents a foreseeable risk of moisture penetration behind the cladding and consequent damage, and therefore does not meet these performance requirements.

Valley gutter water must be redirected so that it is safely collected and discharged away from the wall cladding, typically by terminating the valley into a properly designed and installed box gutter or similar compliant junction detail. Any new box gutter and associated flashings should be designed and constructed in accordance with the NCC roof drainage and weatherproofing provisions, and the intent of AS/NZS 3500 (including roof drainage design and overflow provisions) and AS 1562 for the interface between roofing and wall cladding, with all work carried out by a suitably qualified roofing plumber.



3.1.3 Views

GUTTER DISCHARGE**Major Defect/Safety Hazard**

Three sections of the roof were observed to be discharging onto a single valley gutter, increasing the concentrated flow load on that valley. This arrangement can contribute to overflow risk if the valley and downstream drainage are not sized and detailed in accordance with the applicable standards and NCC roof drainage provisions.

The NCC requires roof drainage systems to be designed and constructed so that they safely collect and dispose of surface water without causing dampness or damage to the building, including at valleys and their terminations to gutters or box gutters. This requirement aligns with the intent of AS/NZS 3500 roof drainage provisions and relevant roofing/cladding standards (such as AS 1562), which address the sizing and configuration of valleys and gutters to accommodate contributing roof catchment areas.

The upper gutter should be directed into the left roof tiles via a suitable spreader to distribute the discharge evenly over the roof surface and reduce concentrated flow into the valley. This arrangement is consistent with good roofing practice and the intent of NCC roof drainage provisions and AS/NZS 3500 and AS 1562 for roof water distribution and drainage design.



3.1.4 Views

FLASHING**Major Defect/Safety Hazard**

The valley gutter flashing at the end termination is non-compliant, as it does not provide an adequate weatherproof junction between the valley, roof covering, and adjacent building elements. This arrangement does not satisfy the NCC performance requirements for roof drainage and weatherproofing of roofs and walls, and is inconsistent with the intent of relevant roofing and drainage standards, including AS/NZS 3500 for roof drainage design and AS 1562 for the design and installation of roof and wall cladding interfaces.



3.1.5 Views

SARKING ROOF SPACE**Major Defect/Safety Hazard**

The sarking within the roof space is sagging in several areas to both dwellings. The degree of sagging appears greater than is typically acceptable for pliable building membranes, which are intended to be installed in a reasonably taut manner in accordance with the general intent of AS/NZS 4200 (Pliable building membranes) and AS 4200.1/4200.2 installation requirements.

Excessive sagging can reduce the effectiveness of the sarking in shedding condensation and incidental moisture to the gutters and may allow debris and moisture to accumulate. Further assessment and rectification by a suitably qualified roofing contractor are recommended to ensure the sarking is re-fixed or replaced as necessary to restore compliance with the NCC weatherproofing and condensation management provisions and the relevant sarking standards.



3.1.6 Views

HOLE UNDER VALLEY Major Defect/Safety Hazard

In the vicinity of the reported leak, an opening was identified in the roof space beneath the valley gutter where external light can be seen passing through. This indicates a discontinuity in the roof envelope at this location, likely associated with an inadequate or missing flashing or roof covering element.

This hole is located directly below the valley gutter and corresponds with an area of concentrated water flow from the contributing roof sections. As a result, roof runoff is able to enter the roof space at this point, causing localised water ingress and dampness to the surrounding structure and linings.


The observed opening is therefore considered the probable source of the leak and a significant defect in the roof drainage and weatherproofing system. Rectification by a suitably qualified roofing plumber is recommended, including proper repair of the hole, provision of appropriate flashings, and confirmation that valley discharge and sarking details are compliant and watertight in this area.



3.1.7 Views

SPREADER DISCHARGE Major Defect/Safety Hazard

The downpipe spreader is discharging directly onto the flashing, resulting in concentrated water flow over this junction. This arrangement is not considered good practice, as it can increase the risk of overflow, water ingress, and premature deterioration of the flashing and adjacent building elements; modification by a suitably qualified roofing plumber is recommended so that the spreader discharges appropriately over the roof surface in accordance with relevant NCC roof drainage provisions and applicable Australian Standards.

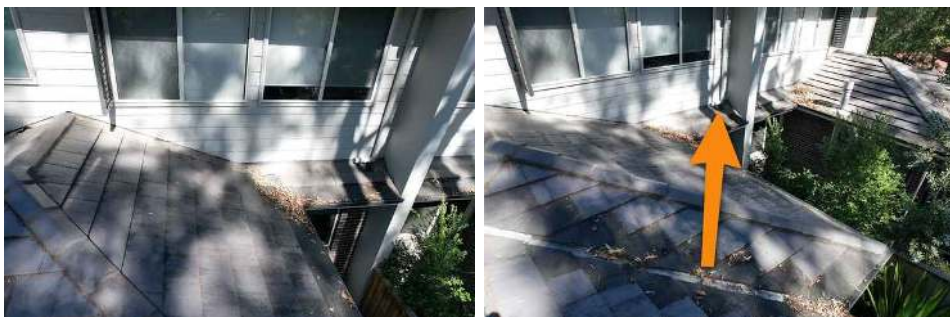

3.1.8 Views

PRESSURE FLASHING**Major Defect/Safety Hazard**

No pressure flashing has been installed to the upturn of the lower roof at the junction. This is a deficient weatherproofing detail that increases the risk of water ingress at the roof interface, and rectification by a suitably qualified roofing plumber is recommended to provide a compliant pressure flashing detail in accordance with NCC roof weatherproofing and relevant roofing standards.